


RoughDeck[®]

HP•HP-H•SS•HE SERIES

FLOOR SCALES

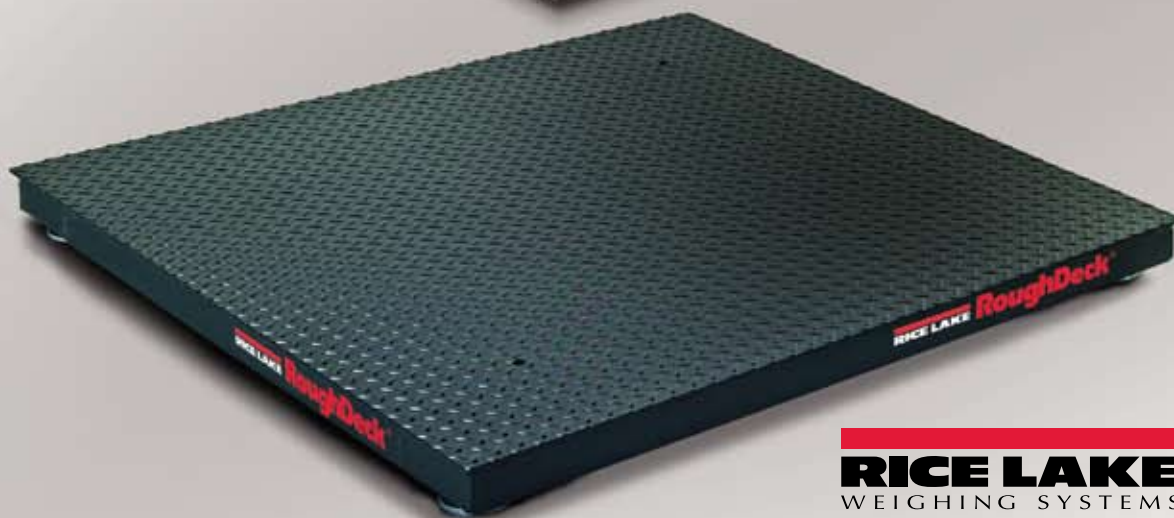


RICE LAKE[®]
WEIGHING SYSTEMS

To be the best by every measure[®]

www.ricelake.com

Why RoughDeck® is Simply the TOUGHEST, Most Accurate Floor Scale Available...

Before introducing our RoughDeck series, design engineers conducted a comprehensive floor scale testing program. They determined that two design factors—minimizing deck deflection and isolating load cells from extraneous forces—were key to low-profile scale accuracy and long life. As a result, the RoughDeck design concept provides outstanding strength and component protection.

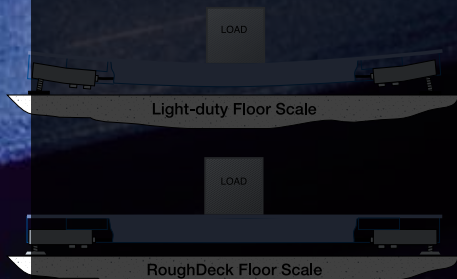

The exaggerated figure illustrates the problems of deck and load cell deflection. The RoughDeck design minimizes deflection of the deck and feet.

The RoughDeck series has low-profile stationary and portable versions available and offers component interchangeability and alternative construction materials to meet specific industrial requirements, from basic shipping and receiving to highly corrosive or washdown environments.



RoughDeck® ... IT DOES

■ Superior Structural Design

Unlike most other scales, the RoughDeck utilizes a full 6" structural channel frame welded to a durable steel deck, providing exceptional rigidity under severe loading conditions (typical of fork lifts and pallet jacks). This design has proven so superior that the RoughDeck carries a full 5-year warranty on the deck structure. The cross sections shown compare the deck structure of the RoughDeck with other low-profile floor scales. The placement of underdeck supports on the RoughDeck minimizes deflection in all directions. Intermediate supports are added to prevent the top plate from "dishing" under heavy point loads.



Underside comparison



Light-duty

Light-duty


RoughDeck

■ Accuracy Requires a Specialized Foot

Many scales retain side loads and suffer from poor return to zero when bumped laterally. The slight plasticity flow of the SUREFOOT™ design eliminates such residual side loads and provides excellent return to zero.




The RoughDeck was engineered to use a steel and neoprene sandwich design called SUREFOOT. A steel cup sits on the floor and is bonded by a pliable neoprene cushion to a steel top plate with attached threaded stem. This pliable sandwich allows the stem and top plate some plasticity to move laterally and tilt independently of the bottom steel cup. This allows the foot to accommodate small deflections and uneven floors.



■ Load Cell Mounting Plate and SUREFOOT

To minimize localized deflection of the load cell, the mounting plate is welded to the channel frame rather than the deck plate.

Adjustable SUREFOOT support feet incorporate stainless steel and neoprene. This unique combination decreases extraneous forces on the load cell, resulting in superior accuracy and repeatability.

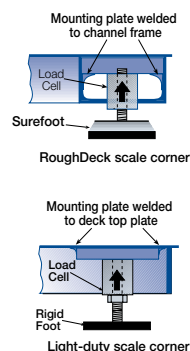

■ Load Cell and Cable Protection

The unique channel structure of the RoughDeck provides enclosed protection for underdeck components so they can't be ripped out through rough handling use.

Load cells are recessed within the 6" channels, and conduit lies within the channels to ease pushing load cell cables through and deter rodent damage to the cables. A 20' length of hostile environment indicator cable is included to complete the installation.

■ TuffSeal Junction Box Protects Circuitry



The rugged TuffSeal™ junction boxes are specifically designed to protect sensitive circuitry from damage caused by moisture. A stainless steel junction box is included with all models. Its unique closure design inhibits moisture ingress and a Gore™ breather vent helps equalize the pressure inside the enclosure which can be caused by sudden temperature or environmental changes.

ESN'T GET ANY TOUGHER THAN THIS.

RoughDeck **HP** & **HP-H** High Accuracy, Heavy Capacity

► Non washdown environments

The RoughDeck HP's best-in-class features are enhanced to deliver more reliability and higher performance than ever before.

The RoughDeck HP's NEMA 4 aluminum TuffSeal junction box is protected from forks and industrial abuse by a 6" structural steel channel frame and diamond treadplate safety deck. The junction box is also mounted as a handy slide-out tray that eases setup and service access. Cables include sturdy cord grips or a quick disconnect for added convenience. In addition, all load cell cables are enclosed in conduit, alleviating danger of rough handling. All load cells are recessed within the channel for protection on all sides, while maintaining easy access for leveling. What's more, the RoughDeck HP is backed by an all-inclusive 5-year limited warranty!

Available in 1000 to 30,000 lb capacities, the RoughDeck HP is the industry leader for precision weighing in Legal-for-Trade applications.

Heavy-Capacity Model

The HP-H model offers the exact superior structural design of the HP model, but with added capacity for the most demanding applications.



Both HP and HP-H have a slide-out junction box for quick access and superior protection from moisture and dirt.



Measurement
Canada Approved
(HP model only)



The RoughDeck design has proven so superior that it carries a 5-year limited warranty.



RoughDeck **SS** Stainless Steel, Corrosion Resistant

► Corrosive dry chemical environments



Measurement
Canada Approved

The RoughDeck SS floor scale is designed specifically for Legal-for-Trade applications requiring the added corrosion protection of stainless steel. Applications include dry chemical operations, fertilizer plants and other industries which require non-washdown corrosion resistance.

A rigid 6", 304 stainless steel channel frame and smooth top plate provide a durable scale deck. For added corrosion resistance, four NTEP-certified stainless steel load cells and surefeet, a stainless steel TuffSeal summing junction box and EL147HE hostile environment load cell cable complete the RoughDeck SS package.

The channel frame provides added protection by enclosing the load cells, cable and junction box inside, away from chemicals and other industrial elements.



The SS features an internal junction box slide-out assembly.

RoughDeck **HE** Stainless Steel, Washdown Design

► Harsh chemical or washdown environments



The RoughDeck HE is a hostile environment, stainless steel floor scale designed specifically for corrosion resistance and long life in demanding washdown applications. Design features include a 6", 304 stainless steel channel frame and smooth top plate. The RoughDeck HE comes standard with four stainless steel, IP67 welded seal, shear beam load cells, four stainless steel surefeet, a stainless steel NEMA 4X TuffSeal summing junction box and EL147HE hostile environment load cell cable.

The stainless steel channel frame provides added protection by enclosing load cell cable and load cells, yet provides easy access for installation and service. The NEMA 4X summing TuffSeal junction box can be remotely mounted up to 10' from the scale, keeping sensitive electronic connections away from moisture and chemicals.



The HE features a remote junction box with cable.

HP•HP-H•SS•HE SERIES FLOOR SCALES

Installation Options Add Versatility...

- Indicator floor stand
- Digital weight indicators
- Anchor plates
- Pit frame
- Access ramps
- Bumper guards
- Forklift bumper guards

All installation options are available in mild or stainless steel.



RoughDeck HP

Specifications

End Load Capacity:
1,000 lbs: 200% full scale
2,000 lbs: 100% full scale
10,000 lbs: 80% full scale

Approvals:
NTEP-certified, CC# 92-001A9 Class III, 5000d, Measurement Canada Approved, AM-4827, HC Series

Dimension/Capacities

Size (W x L x H)	Capacity	Est. Ship WT
3' x 3' x 3.5"	1000 lb/500 kg	232 lb
4' x 4' x 3.5"	1000 lb/500 kg	375 lb
2.5' x 2.5' x 3.5"	2000 lb/1000 kg	173 lb
3' x 3' x 3.5"	2000 lb/1000 kg	232 lb
3' x 3' x 3.5"	5000 lb/2500 kg	232 lb
4' x 4' x 3.5"	2000 lb/1000 kg	375 lb
4' x 4' x 3.5"	5000 lb/2500 kg	375 lb
4' x 4' x 3.5"	10,000 lb/5000 kg	375 lb
4' x 5' x 3.5"	5000 lb/2500 kg	437 lb
4' x 5' x 3.5"	10,000 lb/5000 kg	567 lb
4' x 6' x 3.5"	5000 lb/2500 kg	510 lb
4' x 6' x 3.5"	10,000 lb/5000 kg	656 lb
5' x 5' x 3.5"	5000 lb/2500 kg	541 lb
5' x 5' x 3.5"	10,000 lb/5000 kg	696 lb
5' x 6' x 3.5"	5000 lb/2500 kg	646 lb
5' x 6' x 3.5"	10,000 lb/5000 kg	821 lb
5' x 7' x 3.5"	5000 lb/2500 kg	734 lb
5' x 7' x 3.5"	10,000 lb/5000 kg	929 lb

RoughDeck SS

Specifications

End Load Capacity:
1,000 lbs: 200% full scale
2,000 lbs: 100% full scale
10,000 lbs: 80% full scale

Approvals:
NTEP - certified, CC #92-001A9 Class III 5000d Measurement Canada Approved, AM-4827, HCSS Series

Dimension/Capacities

Size (W x L x H)	Capacity	Est. Ship WT
2.5' x 2.5' x 3.5"	2000 lb/1000 kg	173 lb
3' x 3' x 3.5"	1000 lb/500 kg	232 lb
3' x 3' x 3.5"	2000 lb/1000 kg	232 lb
4' x 4' x 3.5"	1000 lb/500 kg	375 lb
4' x 4' x 3.5"	5000 lb/2500 kg	375 lb
4' x 4' x 3.5"	10,000 lb/5000 kg	490 lb
4' x 5' x 3.5"	5000 lb/2500 kg	437 lb
4' x 5' x 3.5"	10,000 lb/5000 kg	567 lb
5' x 5' x 3.5"	5000 lb/2500 kg	541 lb
5' x 5' x 3.5"	10,000 lb/5000 kg	696 lb
5' x 7' x 3.5"	10,000 lb/5000 kg	929 lb

Your Rice Lake Weighing Systems distributor is:

RoughDeck® Standard Features/Options

Approvals:

NTEP-certified, Class III 5000 divisions
Measurement Canada Approved

Load Cells:

Factory Mutual-approved
Alloy steel, nickel-plated
Stainless steel
Stainless steel, welded seal
Stainless steel hermetically sealed

Construction:

Mild steel
304 stainless steel

Deck:

Mild steel diamond treadplate
Smooth stainless steel
Stainless steel diamond treadplate

Junction Box:

Integral, side-entry NEMA 4X stainless steel TuffSeal
Remote NEMA 4X stainless steel TuffSeal
Top access

Miscellaneous:

4 adjustable stainless steel SUREFOOT™ support feet
mV/V output: 1.50-1.87 mV/V nominal
20' EL147HE Hostile Environment
Load Cell Cable
Threaded eyebolt holes
Custom sizes
Top access foot adjustment holes
Epoxy paint

	HP	HP-H	SS	HE
Approvals:				
NTEP-certified, Class III 5000 divisions	•	•	•	•
Measurement Canada Approved	•	•	•	•
Load Cells:				
Factory Mutual-approved	•	•		•
Alloy steel, nickel-plated	•	•		
Stainless steel	Opt	Opt	•	•
Stainless steel, welded seal	Opt	Opt	Opt	•
Stainless steel hermetically sealed	Opt	Opt	Opt	Opt
Construction:				
Mild steel	•	•		
304 stainless steel			•	•
Deck:				
Mild steel diamond treadplate	•	•		
Smooth stainless steel			•	•
Stainless steel diamond treadplate			Consult Factory	
Junction Box:				
Integral, side-entry NEMA 4X stainless steel TuffSeal	•	•	•	
Remote NEMA 4X stainless steel TuffSeal	Opt	Opt	Opt	•
Top access	Opt	Opt	Opt	Opt
Miscellaneous:				
4 adjustable stainless steel SUREFOOT™ support feet	•	•	•	•
mV/V output: 1.50-1.87 mV/V nominal	•	•	•	•
20' EL147HE Hostile Environment	Std with or without Quick-Connect		•	•
Load Cell Cable	•	•	•	•
Threaded eyebolt holes	Opt	Opt	Opt	Opt
Custom sizes	Opt	Opt	Opt	Opt
Top access foot adjustment holes	Opt	Opt		
Epoxy paint	Opt	Opt		

RoughDeck HP-H

Specifications

End Load Capacity:
1,000 lbs: 200% full scale
2,000 & 5,000 lbs:
100% full scale
10,000 lbs: 80% full scale

Approvals:
NTEP-certified, CC# 92-001A9 Class III, 5000d, Measurement Canada Approved, AM-4827, HC Series

Dimension/Capacities

Size (W x L x H)	Capacity	Est. Ship WT
4' x 4' x 4"	20,000 lb/10,000 kg	601 lb
4' x 5' x 4"	20,000 lb/10,000 kg	775 lb
4' x 6' x 4"	20,000 lb/10,000 kg	926 lb
4' x 7' x 4"	20,000 lb/10,000 kg	1135 lb
5' x 5' x 4"	20,000 lb/10,000 kg	926 lb
5' x 6' x 4"	20,000 lb/10,000 kg	1104 lb
5' x 7' x 4"	20,000 lb/10,000 kg	1377 lb
6' x 6' x 4"	20,000 lb/10,000 kg	1319 lb
6' x 8' x 4"	20,000 lb/10,000 kg	1861 lb
7' x 9' x 4"	20,000 lb/10,000 kg	2408 lb
7' x 10' x 4"	20,000 lb/10,000 kg	2959 lb
8' x 10' x 4"	20,000 lb/10,000 kg	3108 lb
4' x 4' x 5"	30,000 lb/15,000 kg	675 lb
4' x 5' x 5"	30,000 lb/15,000 kg	839 lb
4' x 6' x 5"	30,000 lb/15,000 kg	1071 lb
4' x 7' x 5"	30,000 lb/15,000 kg	1200 lb
5' x 5' x 5"	30,000 lb/15,000 kg	1021 lb
5' x 7' x 5"	30,000 lb/15,000 kg	1448 lb
6' x 6' x 5"	30,000 lb/15,000 kg	1438 lb
7' x 10' x 5"	30,000 lb/15,000 kg	3372 lb
8' x 10' x 5"	30,000 lb/15,000 kg	3699 lb

RoughDeck HE

Specifications

End Load Capacity:
2,000 lbs and 5,000 lbs:
100% full scale
10,000 lbs: 80% full scale

Approvals:
NTEP-certified, CC# 92-001A9 Designed to meet or exceed H44, 5000, 10,000 - Class III 5000d 2000 - Class III 4000d

Dimension/Capacities

Size (W x L x H)	Capacity	Est. Ship WT
2.5' x 2.5' x 3.5"	2000 lb/1000 kg	173 lb
3' x 3' x 3.5"	2000 lb/1000 kg	232 lb
4' x 4' x 3.5"	5000 lb/2500 kg	375 lb
4' x 4' x 3.5"	10,000 lb/5000 kg	490 lb
4' x 5' x 3.5"	5000 lb/2500 kg	437 lb
4' x 5' x 3.5"	10,000 lb/5000 kg	567 lb
5' x 5' x 3.5"	5000 lb/2500 kg	541 lb
5' x 5' x 3.5"	10,000 lb/5000 kg	696 lb
5' x 7' x 3.5"	10,000 lb/5000 kg	929 lb